


MN 型智能数显表

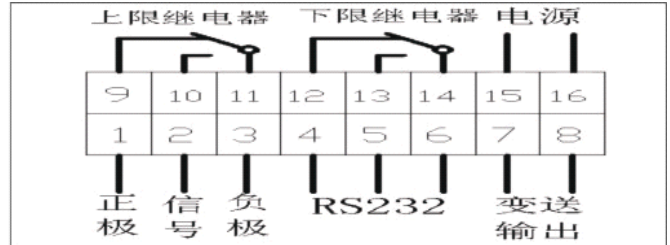

- Diagram of connecting Terminals
- Conventional relay output
- Single signal input
- Full scale and zero point correction, power off and keep the memory.
- Remarks:

Process-controlled indicator with digital display. Adaption of potentiometric transducers or active sensors with standardized output signals.

Main Parameters	
Series	MN-010
Housing size/Display height	96×48×112mm,14mm
Display projection	0-9999
Accuracy	0.01% FS
Update rate mas.	32/s
Inputs	Potentiometer/Current/Voltage
Temperature coefficient	20/50 ppm/K
Operating temperature range	0-50°C
Comparaor outputs	0,2,4
Supply voltage	24 VDC, 110/220 VAC
Analogue output	.
Interface	RS232